




SPRAY COATER

FYTRONIX 9000

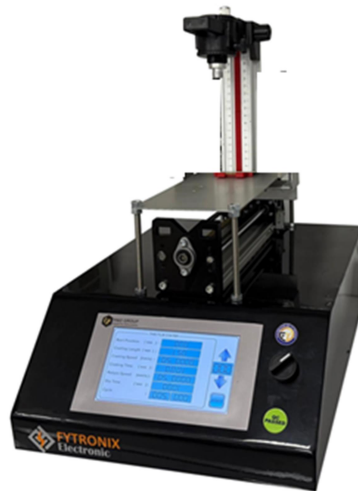

SPRAY COATER

FYTRONIX SPRAY COATER is a tool to prepare films. This spray coater is widely used in industry and academia.

SPRAY COATER

Air pressure: 0.15 to 8 Bar

Fluid Pressure: 0.1 to 4 Bar

Nozül Gauge: 18 to 25 G

Start position

Coating area: movable in Y direction

Coating length: 200 mm

Coating Speed: 0-30 mm/s

Return Speed

Dry time

Cycle

Temperature range: 150 °C

Temperature controller

Beaker holder

CE certificate